

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 March 2005 (10.03.2005)

PCT

(10) International Publication Number  
**WO 2005/021255 A1**

(51) International Patent Classification<sup>7</sup>: **B32B 15/18,**  
15/20, C22C 9/10, C10G 75/00

(74) Agent: MELIN, Linda; Sandvik AB, Intellectual Prop-  
erty, S-811 81 Sandviken (SE).

(21) International Application Number:  
PCT/SE2004/001242

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(22) International Filing Date: 27 August 2004 (27.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0302320-7 28 August 2003 (28.08.2003) SE

(71) Applicant (*for all designated States except US*): SAND-  
VIK AB [SE/SE]; S-811 81 Sandviken (SE).


(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): HERNBLOM,  
Johan [SE/SE]; Målargatan 8, S-811 36 Sandviken (SE).  
GÖRANSSON, Kenneth [SE/SE]; Bessemergatan 51,  
S-811 33 Sandviken (SE).

[Continued on next page]

(54) Title: COMPOSITE TUBE

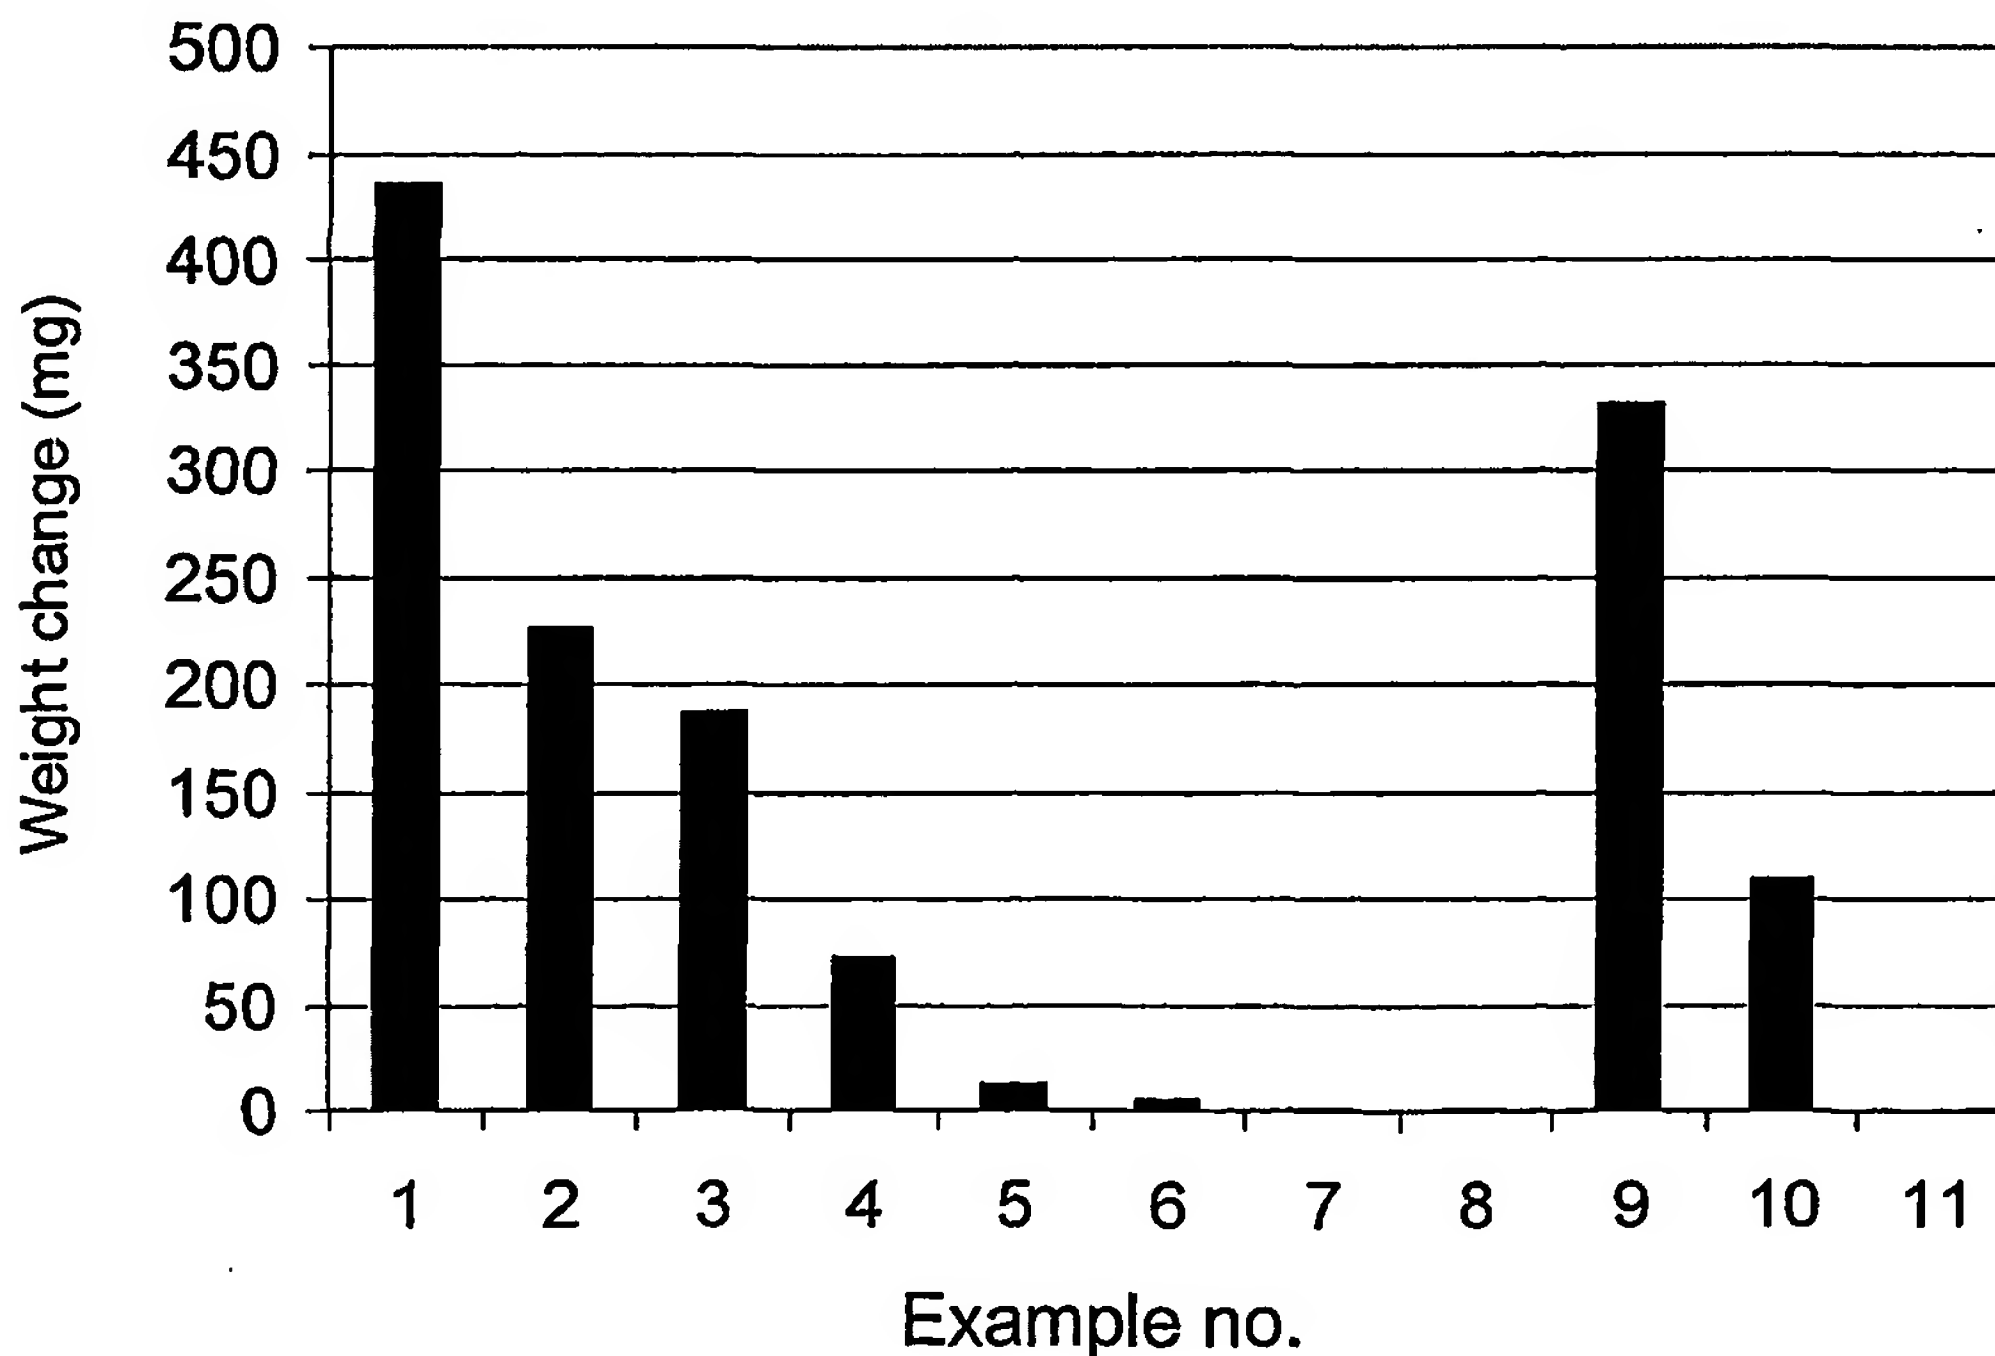

(57) Abstract: A composite tube having a corrosion resistant member and a load-bearing member is provided. The corrosion resis-  
tant member is a Cu-Al alloy and has a wall thickness of at least 0.5 mm, while the load-bearing member is a Fe, Ni or Co based alloy  
having a wall thickness of at least 1 mm. The composite tube can be manufactured by conventional means like extrusion, rolling,  
welding etc. The composite tube is to be used in environments where the risk of metal dusting, coking or carburisation is high.

WO 2005/021255 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*